



XA2 SERIES

ARTICULATED CAPTURE ARM



Diversitech's XA2 series fume extraction arms provide users with an ultra-smooth articulation and light-weight anodized aluminum construction for effortless re-positioning.

The Extractor capture arm features a pantograph external structure allowing the arm to be self-supporting even when fully extended and the pantograph mechanism offers easy and quick adjustment and maintenance. The heavy duty durable steel base pivots 360° and the square flanged hood with a built in handle offers a high face velocity, is externally adjustable and is available with an optional LED light kit.

With Diversitech's line of fume exhaust arms, blowers & booms, you can create a capture-at-source solution for fumes & dust that adequately protects your workers. By capturing airborne contaminants as they are produced, these extraction arms & blowers help you stay OSHA compliant, and ensure that your working environment is clean and safe.


Features:

- Smooth, low-friction movement
- Flanged suction hood
- Wall mounted, column mounted or portable
- Externally articulated, gas spring loaded
- Industrial swivel-base


Options:

- Blowers (1500 to 2500 CFM)
- Hood mounted LED light kit
- Wall mounting bracket
- Extension booms (5' or 10')



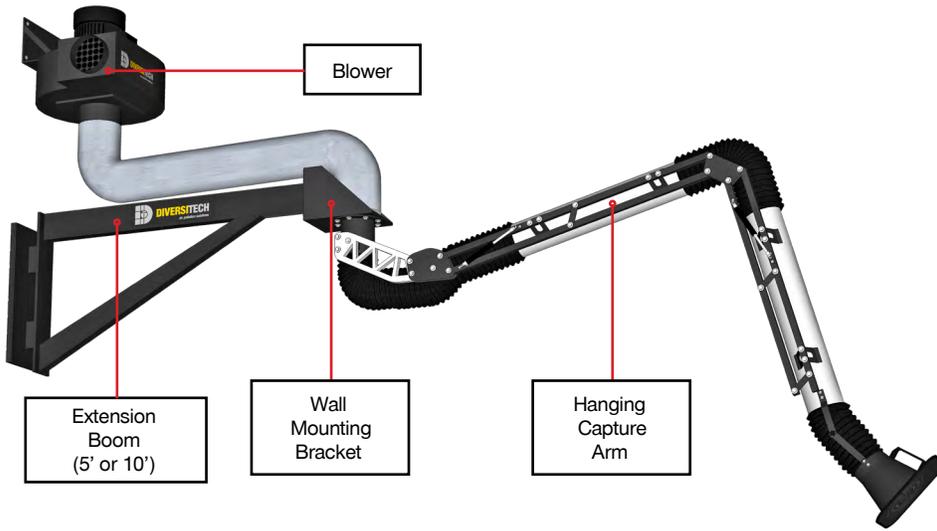


Blowers

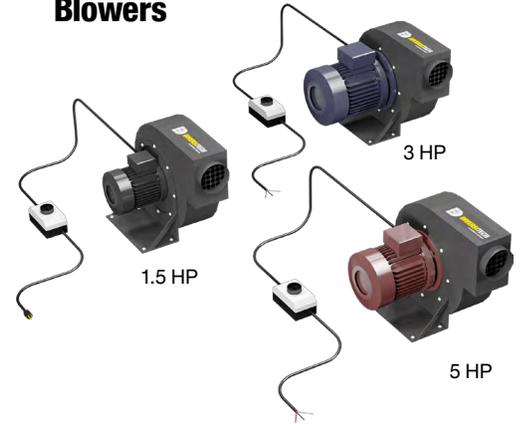

Dimensions**

Model	Arm Length (ft.)	Arm Diameter (in.)	Net Weight (lbs.)	Product Dimensions (in.)		
				Width (in.)	Height (in.)	Length (in.)
XA2-6H06	6.5	6	35	13	14	78
XA2-6H10	10	6	45	13	14	120
XA2-6H13	13	6	70	13	14	158
BOOM-6-5	---	---	105	13	44	85
BOOM-6-10	---	---	135	13	44	140
BR-015	---	---	95	19	8	22
BR-030	---	---	110	19	8	22
BR-050	---	---	135	23	11	27

Remote Mounting Kits

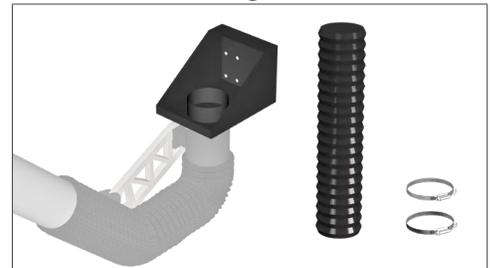

Part Number	Bracket	Flex Hose (ft.)	Hose Clamps
XA2-WMB	1	---	---
A-ECO-RMK6	1	6	2
A-ECO-RMK12	1	12	2

** Product dimensions are based on base-models and may vary depending on selected product features. Please contact us for an accurate shipping quote.

Technical Specifications

Blower Model	Motor (H.P.)	Phase (hz)	Power				Airflow (CFM)	Cord Length (ft.)	Type
			@120V (amps)	@230V (amps)	@460V (amps)	@575V (amps)			
BR-015	1.5	1/60Hz	14.2	---	---	---	1200	6	TEFC
BR-030	3.0	3/60Hz	---	8.0	4.0	3.1	1800	6	TEFC
BR-050	5.0	3/60Hz	---	12.0	6.0	4.6	2500	6	TEFC

HEAD OFFICE

1200 55th Avenue
Montreal, QC H8T 3J8

DISTRIBUTION CENTERS

CANADA Montreal, QC Toronto, ON
UNITED STATES Trenton, NJ Chicago, IL Reno, NV

CONTACT US

Toll Free: 1-800-361-3733
info@diversitech.ca